

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
29 September 2005 (29.09.2005)

PCT

(10) International Publication Number
WO 2005/089059 A3

(51) International Patent Classification⁷: A61B 17/04

(74) Agent: WOLFF, BREGMAN AND GOLLER; P.O. Box 1352, 91013 Jerusalem (IL).

(21) International Application Number:

PCT/IL2005/000218

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 23 February 2005 (23.02.2005)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

English

(26) Publication Language: English

English

(30) Priority Data:


161067 24 March 2004 (24.03.2004) IL

Published:

— with international search report

[Continued on next page]

(54) Title: LAPAROSCOPIC AORTIC REPAIR BY INTRAVASCULAR DEVICES

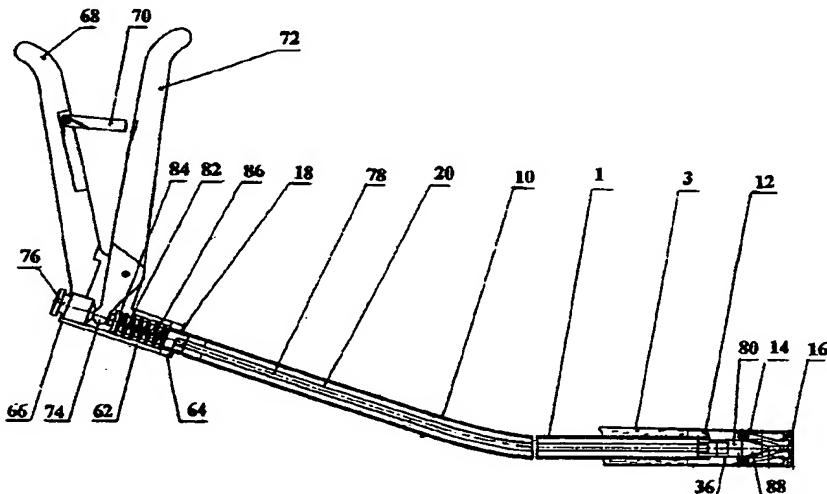

WO 2005/089059 A3

(57) Abstract: Medical methods and apparatus for locating and securing intravascular devices, substantially grafts or stents-grafts, via a laparoscopic duct created by a surgical procedure to approach a blood vessel lumen. A stapler including a tubular body having at its distal end a head with a die and die lid and at its proximal end a control mechanism with a retaining handle and a control lever pivotally attached thereto. The lever is operatively connected via a spring-loaded pressure rod with a fastener located in the die. The movement of the lever is transformed into radial forces necessary for punching through the wall of the intravascular device and the surrounding blood vessel wall with a fastener and simultaneously bending ends of the fastener apart. Securing the ends of the intravascular device to the wall of a blood vessel is performed via a set of at least two staplers, each having several simultaneously deliverable fasteners.